






Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	1 / 21

Thin Film Transistor LCD MODULE  
MODEL: AWT-800480T50N03  
Customer's No.:

Acceptance

10 -1 Floor, No.192, Tahtung Road,  
Sec. 3, Hsi-Chih City,  
Taipei Hsien, Taiwan

Approved and Checked by

Approved by	Checked by		Made by
			



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	2 / 21

## Record of Revisions

Rev	Date	Sub-Model	Description of change
A	Jan. 17, 2012		<b>Preliminary Product Specification was first issued.</b>



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	3 / 21

## Table of contents

- 1. General description**
- 2. Absolute maximum ratings**
- 3. Optical characteristics**
- 4. Block diagram**
- 5 Interface pin connection**
- 6. Electrical characteristics**
- 7. Reliability test items**
- 8. Outline dimension**
- 9. General precaution**



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	4 / 21

## 1. General description

### 1.1 Introduction

The model AWT-800480T50N03 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 5.0 (15:9) inch diagonally measured active display area with WQVGA (800 horizontal by 480 vertical pixel) resolution.

### 1.2 Features

- 5.0 (15:9 diagonal) inch configuration
- 6 bits + FRC driver with 1channel TTL interface
- LED Backlight
- Up/Down, Left/Right reversion selection
- RoHS Compliance

### 1.3 Applications

- Mobile NB,GPS
- Personal Navigation Device
- Multimedia applications and Others AV system

### 1.4 General information

Item	Specification	Unit
Outline Dimension	120.8 x 76.0 x 3.0 (Typ.)	mm
Display area	108.0(H) x 64.8(V)	mm
Number of Pixel	800 RGB(H) x 480(V)	pixels
Pixel pitch	0.135(H) x 0.135(V)	mm
Pixel arrangement	RGB Vertical stripe	
Display mode	Normally white	
Surface treatment	Antiglare, Hard-Coating(3H)	
Weight	66(Typ.)	g
Back-light	Single LED (Side-Light type)	
Power Consumption	B/L System 0.98	W

### 1.5 Mechanical Information

item		Min.	Typ.	Max.	Unit
Module Size	Horizontal(H)	120.6	120.8	121.0	mm
	Vertical(V)	75.8	76	76.2	mm
	Depth(D)	2.8	3.0	3.2	mm



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	5 / 21

## 2.0 ABSOLUTE MAXIMUM RATINGS

### 2.1 Electrical Absolute Rating

#### 2.1.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit.	Note
Power supply voltage	VDD	-0.3	5.0	V	GND=0
	VGH	0.3	40	V	GND=0
	VGL	-20	0.3	V	GND=0
	AVDD	0.5	15	V	AGND=0
	VCOM	0	6	V	
Logic Signal Input Level	V1	-0.3	VDD+0.3	V	

#### 2.1.2 Back-Light Unit

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward voltage	Vf	--	19.8	--	V	(1)(2)
Forward current	If	--	40	--	mA	(1)(2) (3)
Power Consumption	PBL	--	800	--	mW	

Note(1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.

Note (2) Ta =25 ±2℃

Note (3) Test Condition: LED current 40 mA

### 2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Remarks
Operating Temperature	Topa	-20	+70	℃	
Storage Temperature	Tstg	-30	+80	℃	



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	6 / 21

### 3.0 OPTICAL CHARACTERISTICS

#### 3.1 Optical specification:

Item	Symbol	Temp.	Min.	Typ.	Max.	Unit	Condition
Response Time	Tr	25°C	2	4	--	msec	$\theta = 0^\circ, \varphi = 0^\circ$ (Note 1,3)
	Tf	25°C	6	12	--		
Contrast Rate	Cr	25°C	480	600	--	--	$\theta = 0^\circ, \varphi = 0^\circ$ LED:ON, LIGHT:OFF(Note1,2)
Brightness	YL	25°C	320	350	--	Cd/m2	(IL=20mA)(Note1,4)
Visual angle range front and rear	$\theta$	25°C	(θU) 60 (θD) 50			De-gree	$\phi = 0^\circ, CR \geq 10$ LED:ON LIGHT:OFF(Note 1,4)
Visual angle range left and right	$\theta$	25°C	(θL) 65 (θR) 65			De-gree	$\phi = 90^\circ, CR \geq 10$ LED:ON LIGHT:OFF(Note 1,4)
Brightness uniformity	BUNI		70			%	$\theta = 0$ (Note5,7)
Visual angle			6:00				(Note 6)

Item	Symbol	Transmissive			Conditions
		Min.	Typ.	Max.	
Red	XR	0.592	0.642	0.692	Reference: CPT Panel, CIE (x, y) chromaticity (Note 1,4)
	YR	0.293	0.343	0.393	
Green	XG	0.228	0.278	0.328	
	YG	0.516	0.566	0.616	
Blue	XB	0.087	0.137	0.187	
	YB	0.04	0.09	0.14	
White	XW	0.257	0.307	0.357	
	YW	0.276	0.326	0.376	

#### 3.2 Measuring Condition

Measuring surrounding: dark room ,LED current IL : 40mA

Ambient temperature: 25±2oC

15min. warm-up time.


#### 3.3 Measuring Equipment

FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-7 for other optical characteristics. Measuring spot size: 20 ~ 21 mm



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	7 / 21

Note (1) Definition of Viewing Angle :

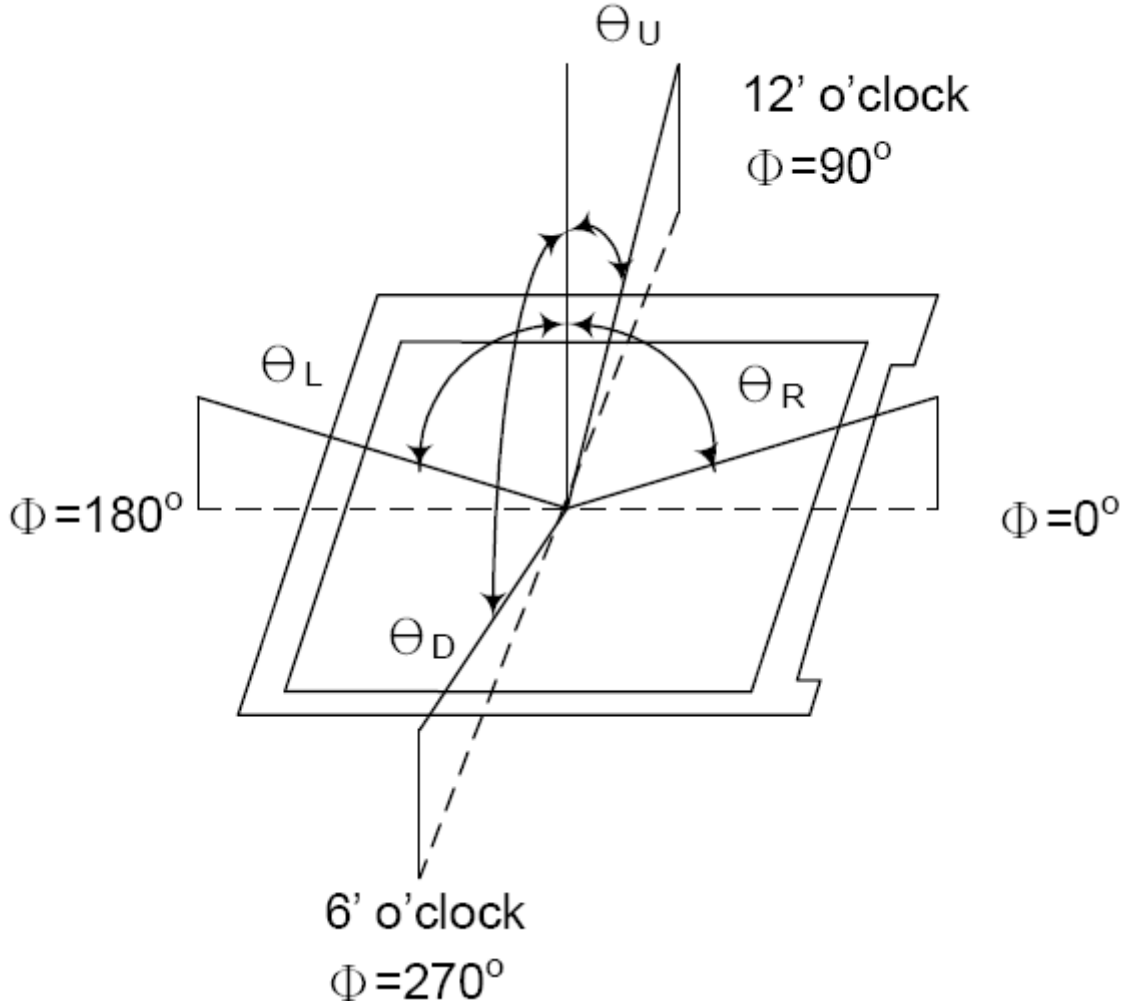

Note (2) Definition of Contrast Ratio (CR):


Measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$




Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	8 / 21

Note (3) Definition of Response Time: Sum of TR and TF

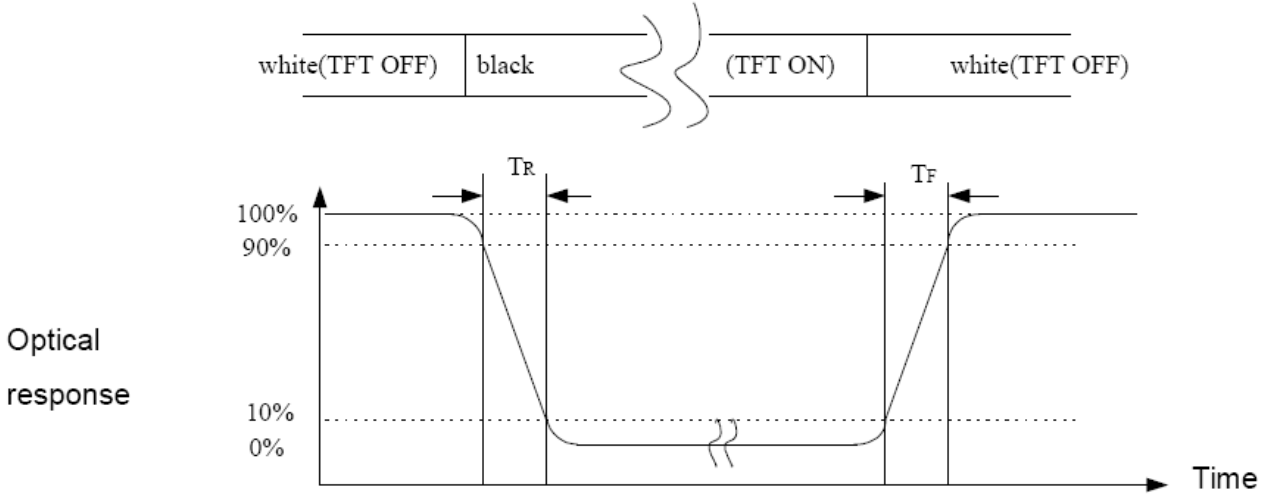

Note (4) Definition of optical measurement setup

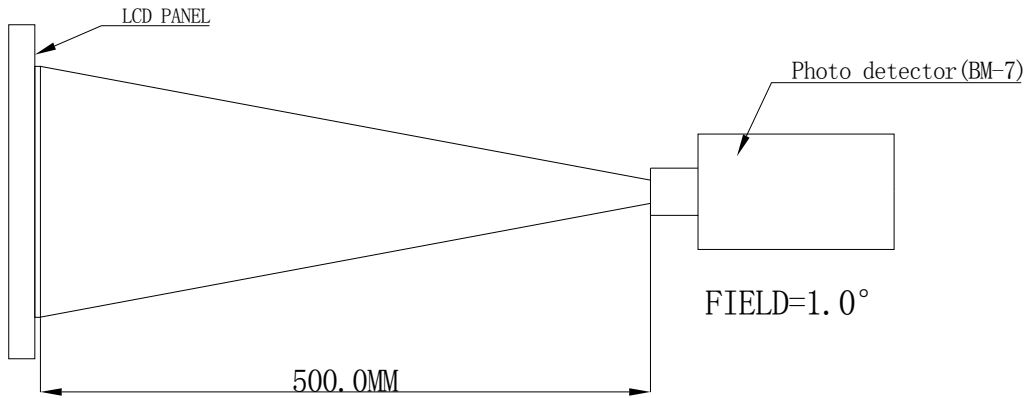






Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	9 / 21

Note (5) Definition of brightness uniformity

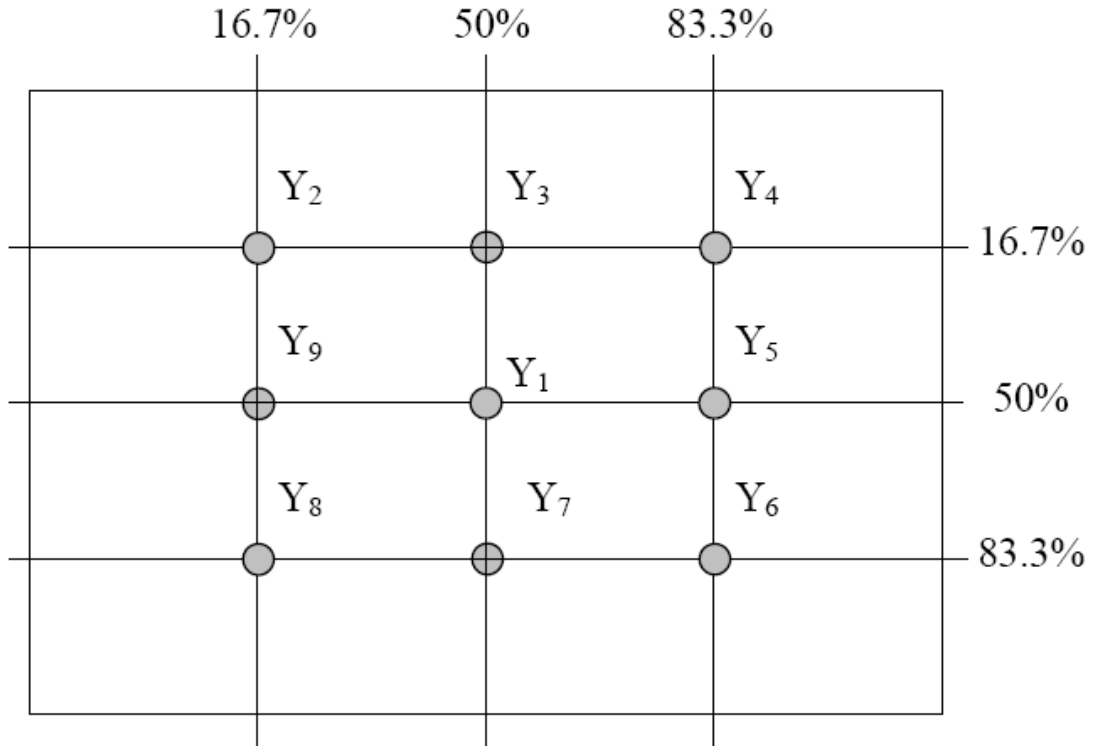

$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})} \times 100\%$$

Note (6) Rubbing Direction (The different Rubbing Direction will cause the different optimal view direction).


Note (7) Measured at the brightness of the panel when all terminals of LCD panel are electrically open.




Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	10 / 21

**4.0 BLOCK DIAGRAM**

**4.1 TFT LCD Module**

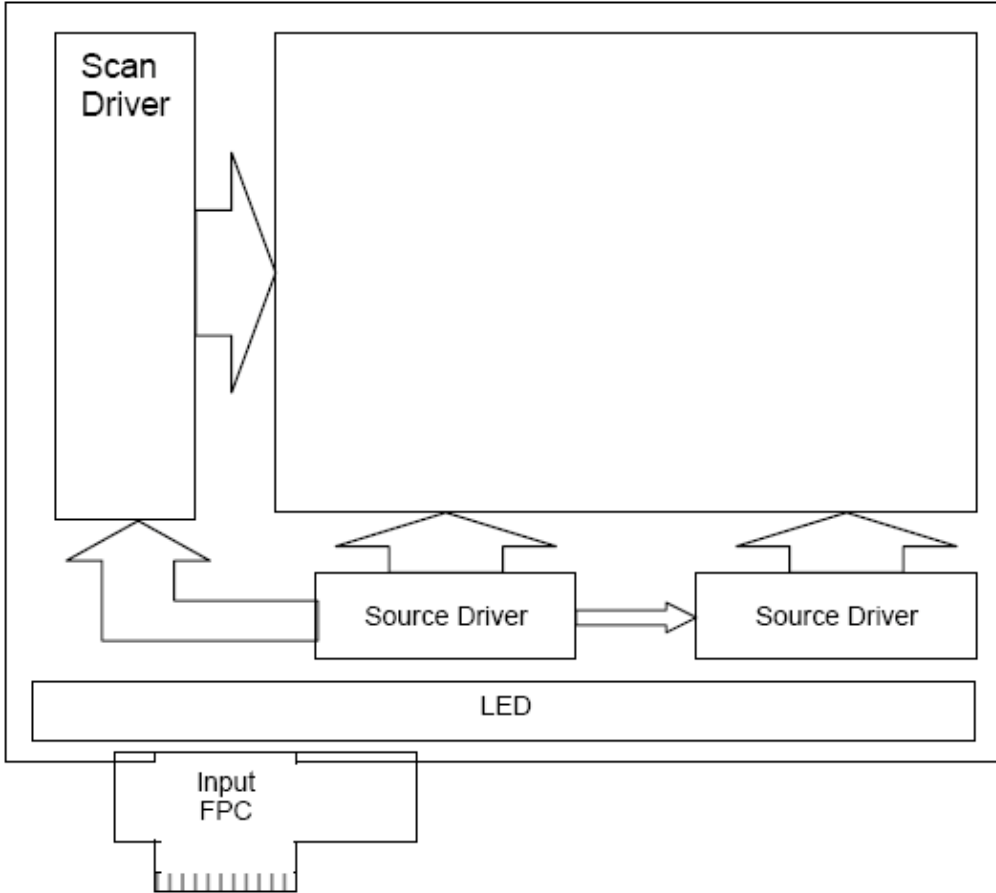

**4.2 Pixel Format**

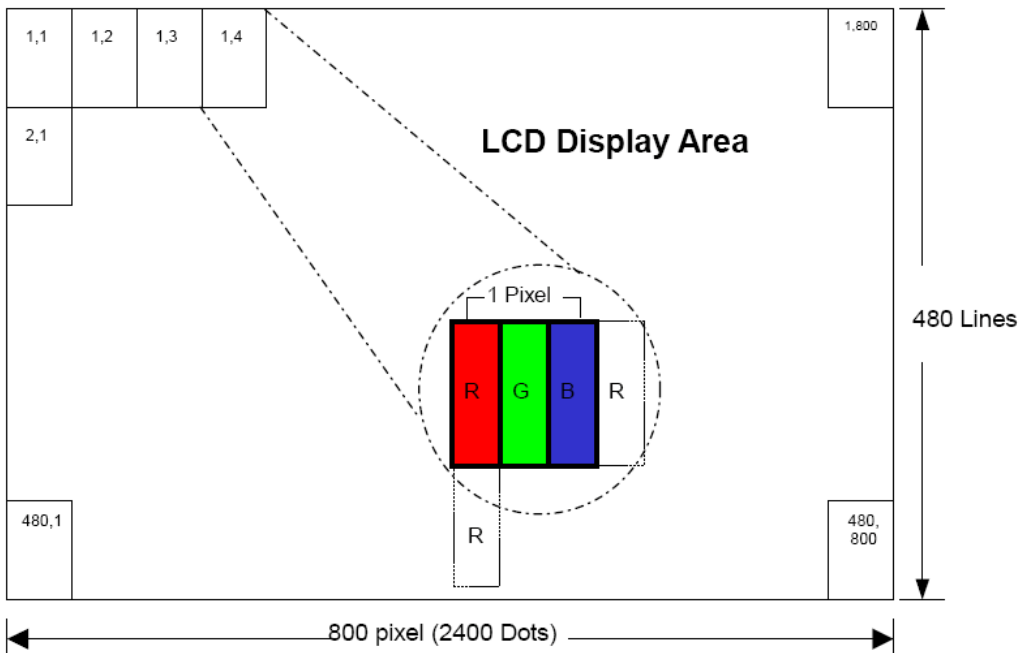



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	11 / 21

## 5.0 INTERFACE PIN CONNECTION

5.1 TFT LCD ModuleCN2 (Input signal): FPC Down Connector, (FH19SC-40S-0.5SH (HIROSE), 40pin, pitch = 0.5mm)

Terminal No.	Symbol	IO	Functions
1	LEDK	P	Power for LED backlight cathode
2	LEDA	P	Power for LED backlight anode
3	GND	P	Power Ground
4	VDD	P	Power Voltage
5	R0	I	Data Input(LSB)
6	R1	I	Data Input
7	R2	I	Data Input
8	R3	I	Data Input
9	R4	I	Data Input
10	R5	I	Data Input
11	R6	I	Data Input
12	R7	I	Data Input (MSB)
13	G0	I	Data Input (LSB)
14	G1	I	Data Input
15	G2	I	Data Input
16	G3	I	Data Input
17	G4	I	Data Input
18	G5	I	Data Input
19	G6	I	Data Input
20	G7	I	Data Input(MSB)
21	B0	I	Data Input(LSB)
22	B1	I	Data Input
23	B2	I	Data Input
24	B3	I	Data Input
25	B4	I	Data Input
26	B5	I	Data Input
27	B6	I	Data Input
28	B7	I	Data Input(MSB)
29	DGND	P	Digital Ground
30	DCLK	I	Dot data clock
31	DISP	I	Display on/ off



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	12 / 21

32	HSYNC	I	Horizontal sync Signal
33	VSYNC	I	Vertical sync signal
34	DE	I	Data Enable
35	NC	--	No Connect
36	GND	P	Power Ground
37	NC	I/O	No Connect
38	NC	I/O	No Connect
39	NC	I/O	No Connect
40	NC	I/O	No Connect



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	13 / 21

## 6.0 ELECTRICAL CHARACTERISTICS

### 6.1 TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	VDD	2.7	3.0	3.5	V	
	VGH	14.5	15	20	V	
	VGL	-10	-7	-6.5	V	
	AVDD	9.85	10	10.15	V	
VCOM	VCOMin	--	3.9	--	V	
Input signal voltage	ViH	0.7 VDD	--	VDD	V	Note(1)
	ViL	0	--	0.3 VDD	V	
Current of power supply	IDD	--	5.426	--	mA	VDD=3.0V
	IADD	--	24.1	--	mA	AVDD=10V(Black)
	IGH	--	0.128	--	mA	VGH=15V
	IGL	--	0.344	--	mA	VGL=-7V
Input level of V1~V5	Vx	AVDD/2		AVDD-0.1		
Input level of V6~V10	Vx	0.1		AVDD/2		

Note (1): HSYNC, VSYNC, DE, Digital Data

Note (2): Be sure to apply the power voltage as the power sequence spec.

Note (3): DGND=AGND=0V

### 6.2 Back-Light Unit

The backlight system is an edge-lighting type with 12 LED.

The characteristics of the LED are shown in the following tables.


Item	Symbol	Min.	Typ.	Max.	Unit	Note
LED current	IL	--	40	--	mA	(2)
LED Voltage	VL	--	19.8	--	V	
Operating LED life time	Hr	20000	--	--	Hour	(1)(2)

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition: Ta=25±3 °C, typical IL=40mA value indicated in the above table until the brightness becomes less than 50%.



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	14 / 21

Note(2) The “LED life time” is defined as the module brightness decrease to 50% original brightness at  $T_a=25^{\circ}\text{C}$  and  $I_L=40\text{mA}$ . The LED lifetime could be decreased if operating  $I_L$  is larger than 40mA. The constant current driving method is suggested.

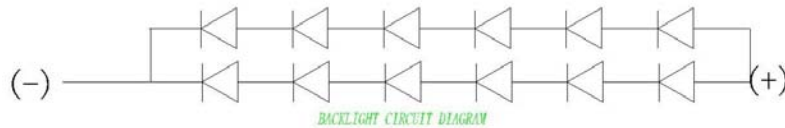



### 6.3 AC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK cycle time	Tcph	25			ns	
DCLK frequency	fclk		30	40	MHZ	
DCLK pulse duty	Tcwh	40	50	60	%	
VSD setup time	Tvst	8			ns	
VSD hold time	Tvhd	8			ns	
HSD setup time	Thst	8			ns	
HSD hold time	Thhd	8			ns	
Data setup time	Tdsu	8			ns	
Data hold time	Tdhd	8			ns	
DE setup time	Tesu	8			ns	
DE hold time	Tehd	8			ns	
Horizontal display area	thd		800		Tcph	
HSD period time	th		928		Tcph	
HSD pulse width	thpw	1	48		Tcph	
HSD back porch	thb		40		Tcph	
HSD front porch	thfp		40		Tcph	
Vertical display area	tvd		480		th	
VSD period time	tv		525		th	
VSD pulse width	tvpw		3		th	
VSD back porch	tvb		29		th	
VSD front porch	tvfp		13		th	




Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	15 / 21

### 6.4 Timing Diagram of Interface Signal

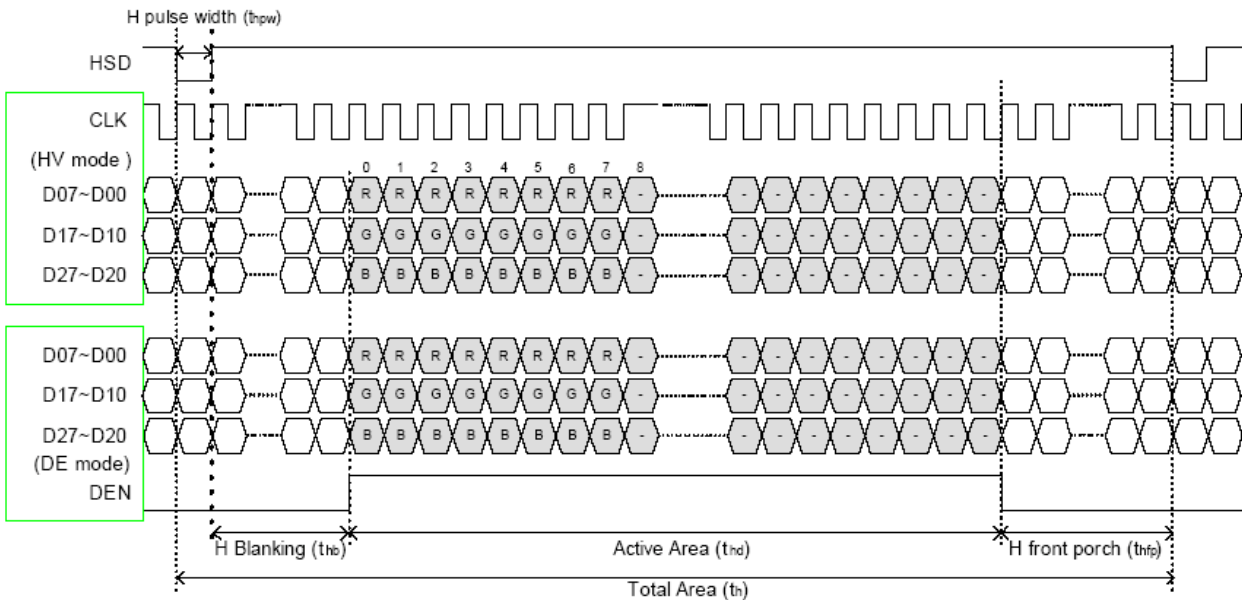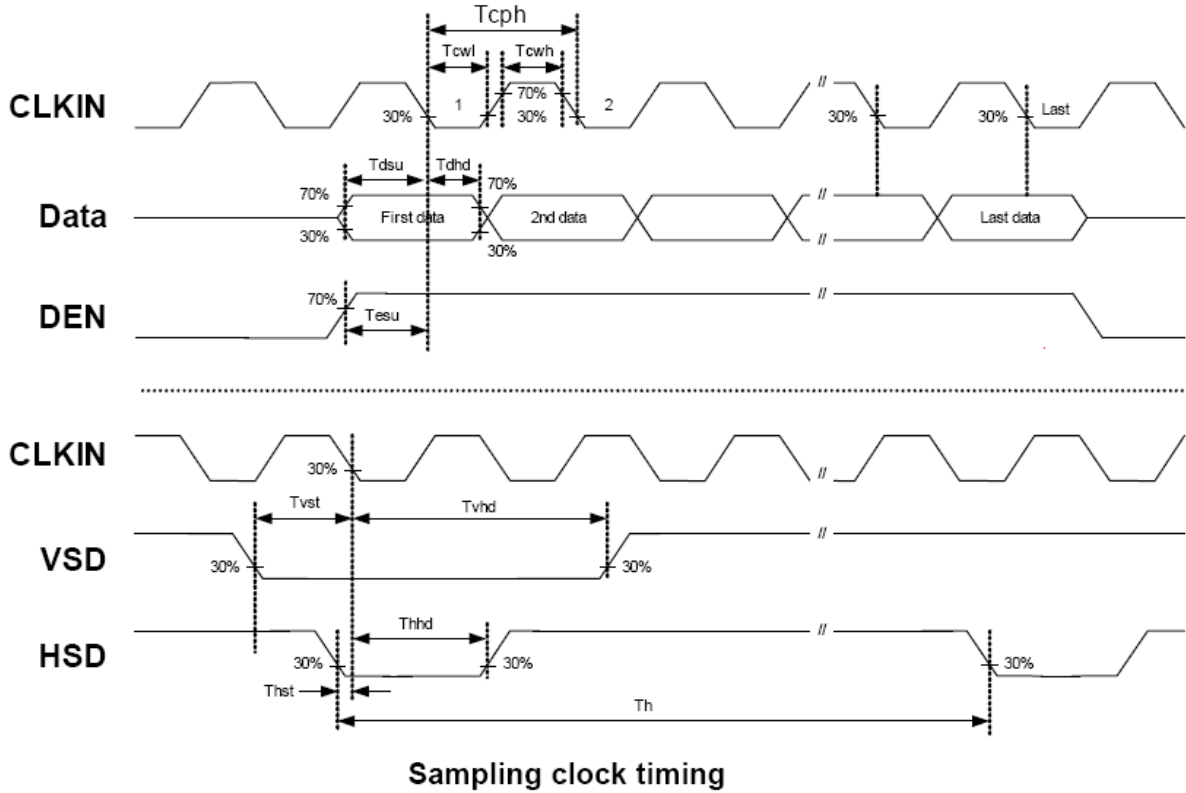




Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	16 / 21

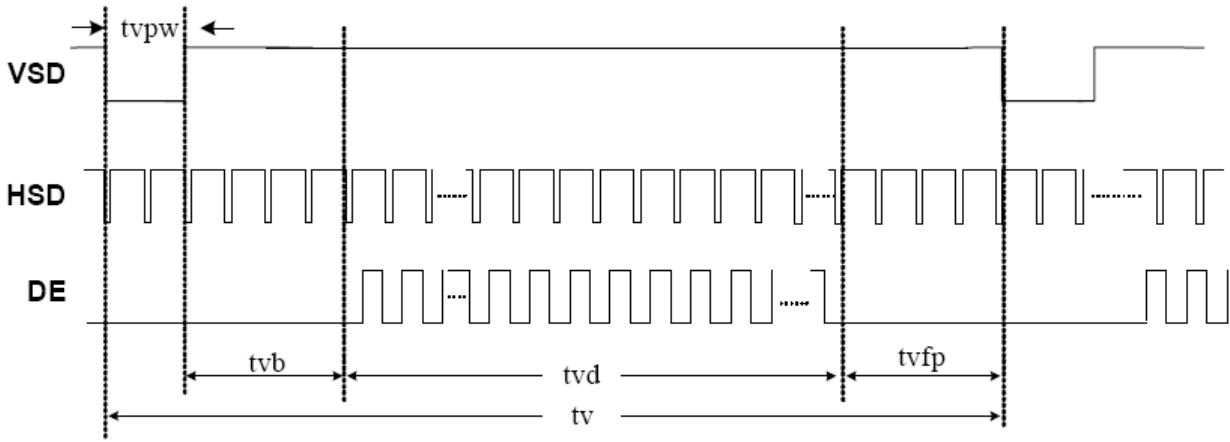

Vertical timing

### 6.5 Power Sequence

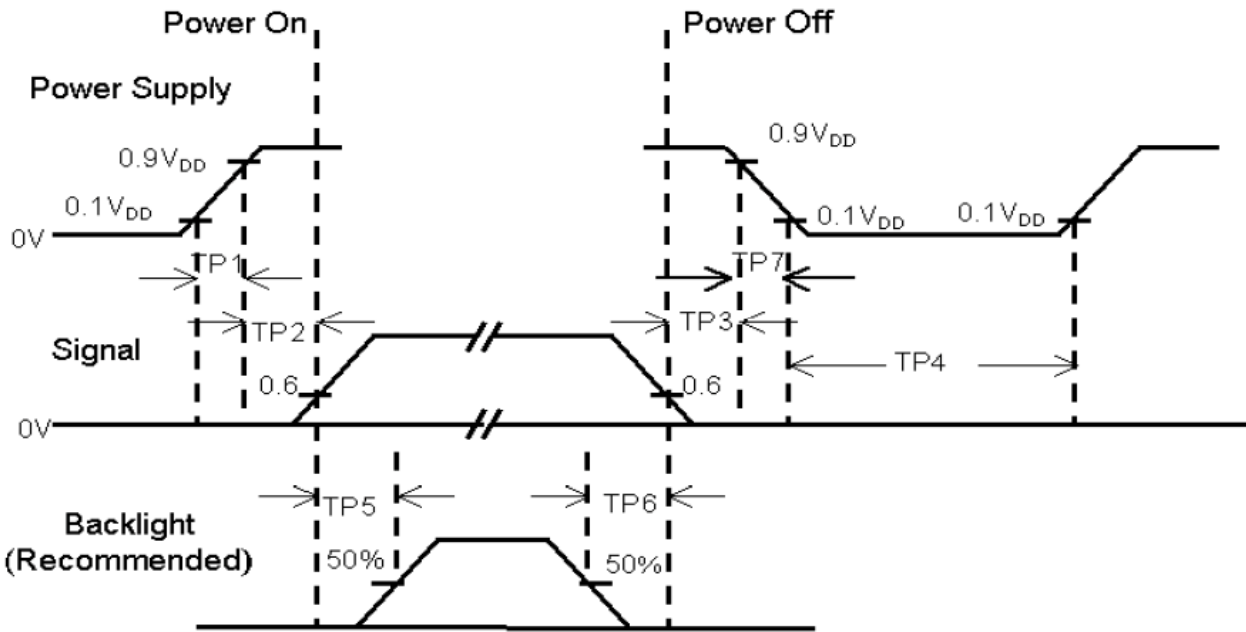





Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	17 / 21

Item	Min.	Typ.	Max.	Unit	Remark
TP1	0.5	--	10	msec	
TP2	0	--	50	msec	
TP3	0	--	50	msec	
TP4	1000	--	--	msec	
TP5	200	--	--	msec	
TP6	200	--	--	msec	
TP7	0.5	--	10	msec	

- Note :** (1) The supply voltage of the external system for the module input should be the same as the definition of  $V_{DD}$ .
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of  $V_{DD}$  = off level, please keep the level of input signal on the low or keep a high impedance.
- (4) TP4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	18 / 21

## 7.0 Reliability test items


Test Item	Test Conditions	Notes
High temperature Operation	70±3°C , T=240hrs	
Low temperature Operation	-20±3°C , T=240hrs	
High Temperature Storage	80±3°C , T=240hrs	1,2
Low Temperature Storage	-30±3°C , T=240hrs	1,2
Humidity Test	60°C , Humidity 90% , 240hrs	1,2
Thermal Shock Test	-30°C, 30min~80°C, 30min (200 cycle)	1,2
Vibration Test(Packing)	Sweep frequency 10~55~10HZ/min Amplitude:0.75mm Test direction:X, Y, Z/3 axis Duration 30min/each axis	2
Static Electricity	150Pf 330ohm ±8KV, 10time air discharge ±4KV, 10time connect discharge	



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	19 / 21

## 8.0 OUTLINE DIMENSION

### Outline Dimension:

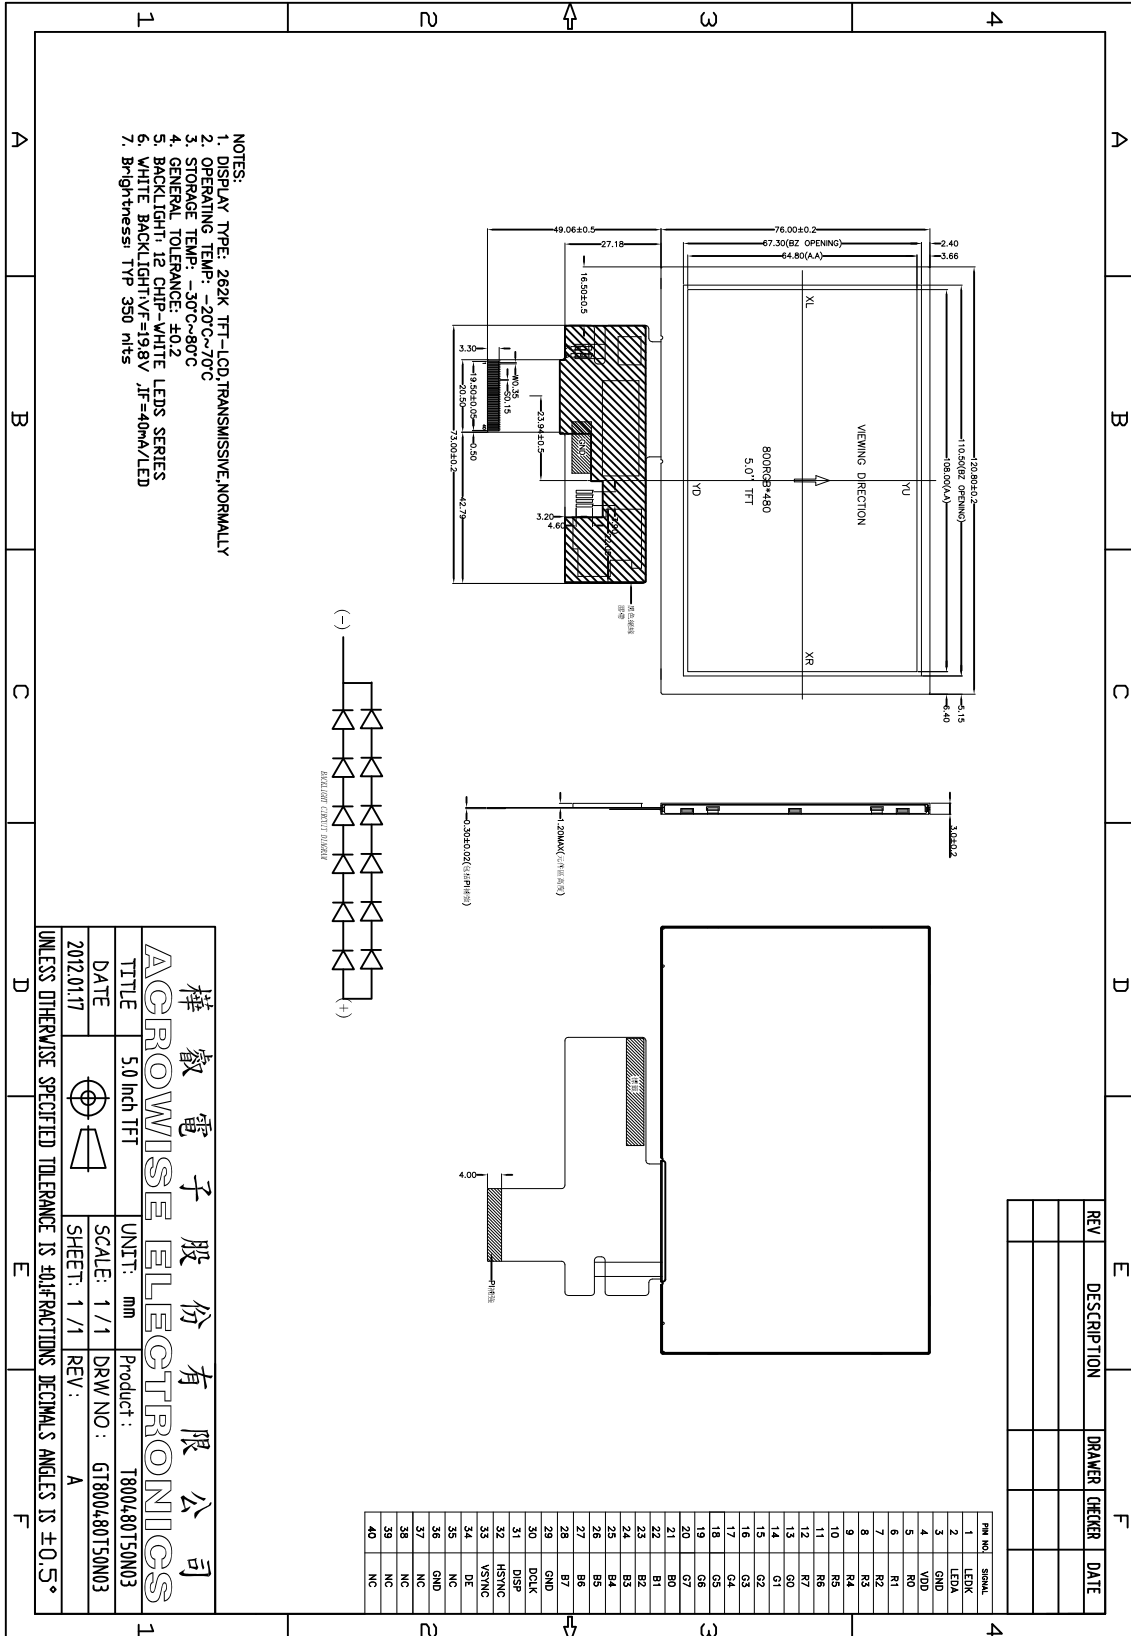



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	20 / 21

## 9.0 GENERAL PRECAUTION

### 9.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life threatening or otherwise catastrophic.

### 9.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. ACROWISE does not warrant the module, if customers disassemble or modify the module.

### 9.3 Breakage of LCD Panel

9.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

9.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

9.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

9.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

### 9.4 Electric Shock

9.4.1. Disconnect power supply before handling LCD module.

9.4.2. Do not pull or fold the LED cable.

9.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

### 9.5 Absolute Maximum Ratings and Power Protection Circuit

9.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged. 9.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time. 11.5.3. It's recommended to employ protection circuit for power supply.

### 9.6 Operation

9.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

9.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.



Product Specification	Model:	AWT-800480T50N03	Rev. No.	Issued Date.	Page.
			A	2012/01/17	21 / 21

**9.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.**

**9.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.**

**9.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.**

## **9.7 Mechanism**

**Please mount LCD module by using mouting holes arranged in four corners tightly.**

## **9.8 Static Electricity**

**9.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.**

**9.8.2. Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.**

## **9.9 Strong Light Exposure**

**The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.**

## **9.10 Disposal**

**When disposing LCD module, obey the local environmental regulations.**